
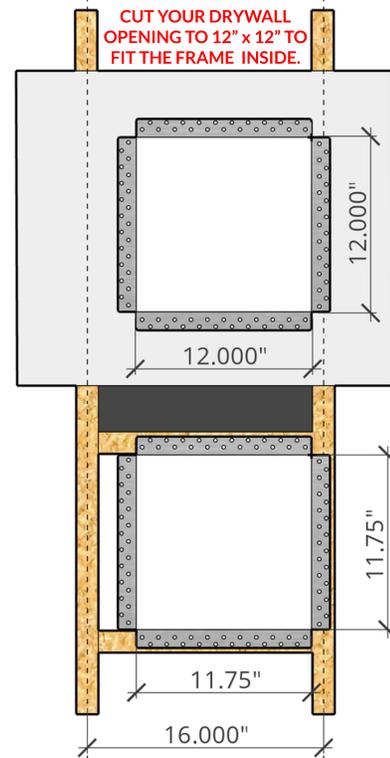


A premium flush mount access panel cover for a 12"x12" drywall opening. This cover can also be used on a wall or ceiling and yields a 10.25"x10.25" accessible area.

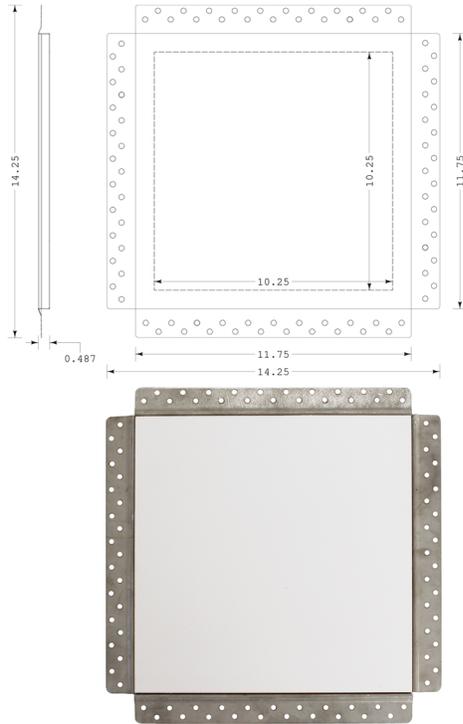

## APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

## FEATURES

- Magnetic, removable, triple fibre reinforced cement board panel.
- 24 Gauge galvanized satin coated steel frame with beaded edge.
- 4 Rare earth magnets (0.25" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- Made from noncombustible material.
- Impact resistance.
- Moisture and water resistant, mold resistant.
- Eco-friendly manufacturing and non-hazardous material.

## PRODUCT SPECIFICATIONS

- Over 105 square inches (677.4 square centimeters) of accessible area
- Overall dimensions are 14.25" x 14.25" x 0.5" (361.9mm x 361.9mm x 12mm).
- Product weight is 2.68 pounds (1.21 kilograms)

## MATERIAL SPECIFICATIONS

- Raw Material: Cement, fibres, quartz sand, non-hazardous filler.
- Density:  $1.0 < D \leq 1.2 \text{ g/cm}^3$ .
- Asbestos Content: 100% asbestos-free.
- Noncombustible as determined by ASTM E2652.
- Water Absorption:  $\leq 40\%$ .
- Resistant Bending Strength:  $\geq 10.5 \text{ MPa dry}$ .
- Linear Variation with Humidity (50%-90% RH):  $\leq 0.25\%$ .
- Freeze and Thaw Cycles: No distortion after 25 repeated cycles.

