
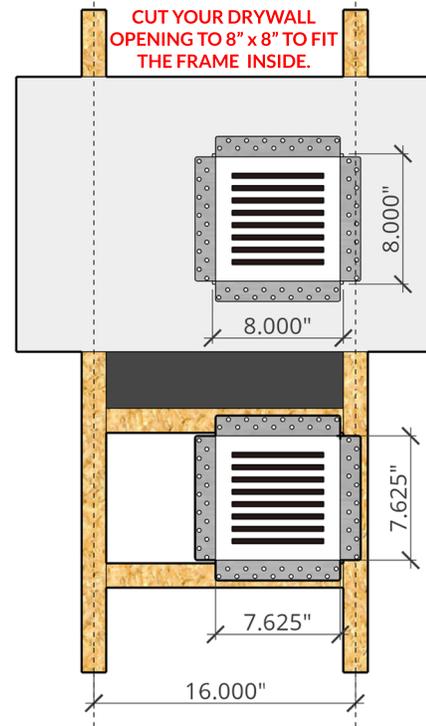


A premium flush mount exhaust fan cover for a 8"x8" drywall opening. This cover can also be used as a cold air return, and yields a 6.125"x6.125" accessible area. (NOTE: your exhaust fan and/or motor needs to fit through this area).

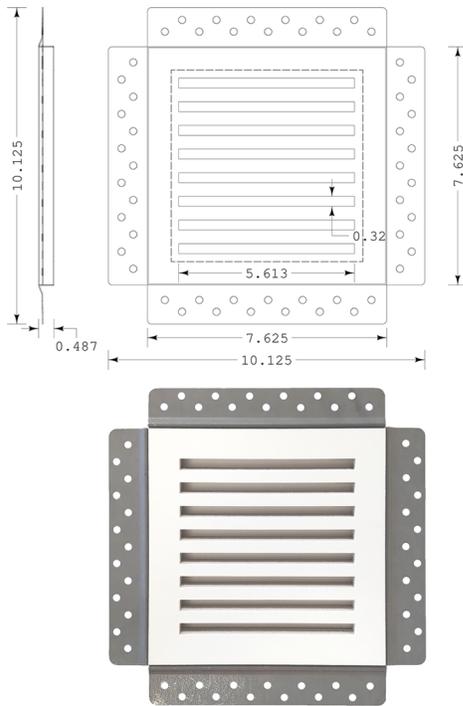

### APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for wall and ceiling installations.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The insert comes primed white and ready for your paint colour.

### FEATURES

- Magnetic, removable, triple fibre reinforced cement board panel.
- 24 Gauge galvanized satin coated steel frame with beaded edge.
- 4 Rare earth magnets (0.25" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- Straight cut slots for unrestricted air flow.
- Made from noncombustible material.
- Higher impact resistance than conventional drywall.
- Moisture and water resistant, mold resistant.
- Eco-friendly manufacturing and non-hazardous material.

### PRODUCT SPECIFICATIONS

- 14.36 square inches (92.64 square centimeters) of open area.
- 8 Rectangular Slots: 5.613" x 0.32 (142.5mm x 8.12mm).
- Overall dimensions are 10.125" x 10.125" x 0.5" (257.17mm x 257.17mm x 12mm).
- Drywall opening required: 8.0" x 8.0" (203.2mm x 203.2mm).
- Accessible area: 6.125" x 6.125" (155.5mm x 155.5mm).
- Product weight is 1.2 pounds (0.54 kilograms)

### MATERIAL SPECIFICATIONS

- Raw Material: Cement, fibres, quartz sand, non-hazardous filler.
- Density:  $1.0 < D \leq 1.2 \text{ g/cm}^3$ .
- Asbestos Content: 100% asbestos-free.
- Noncombustible as determined by ASTM E2652.
- Water Absorption:  $\leq 40\%$ .
- Resistant Bending Strength:  $\geq 10.5 \text{ MPa dry}$ .
- Linear Variation with Humidity (50%-90% RH):  $\leq 0.25\%$ .
- Freeze and Thaw Cycles: No distortion after 25 repeated cycles.

### AIRFLOW DATA

Product Identifier	Opening Width [in]	Opening Height [in]	Core Area [ft <sup>2</sup> ]	Open Area [sq <sup>2</sup> ]	Core Velocity [FPM]	300	400	500	600	700	800	1000	1200	1400
					Core Velocity Pressure ["wc]	0.006	0.010	0.016	0.022	0.030	0.040	0.062	0.090	0.122
MAG-X 8	5.613	5.613	0.219	14.36	Flow [CFM]	48	64	80	96	112	128	160	192	224
					Static Pressure ["wc]	0.027	0.048	0.075	0.107	0.146	0.191	0.298	0.430	0.585

Tested by:  Airflow Sciences Corporation

