


A premium flush mount cold air return cover which replaces the cover for a 30"x6" opening. This cover fits into the drywall opening of 32.25"x10.25" and has a vented/slotted area of 28"x6".

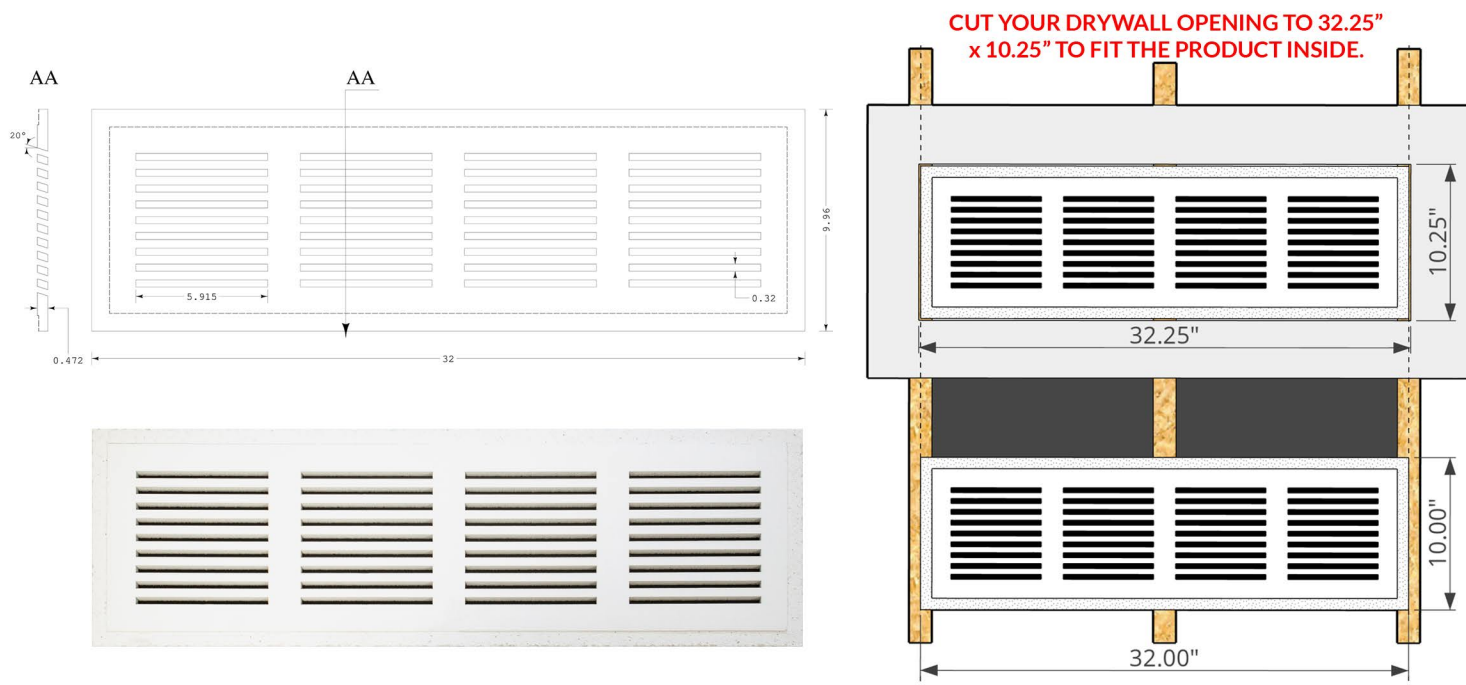

## APPLICATION

- Designed for 1/2" for a permanent installation.
- Suitable for low and high wall installations.
- Screws directly to your wall studs to allow it to be flush.
- Finish taping and seaming the perimeter edge with your drywall.
- **(PRO TIP: cover the slots with painters tape to avoid drywall compound getting in them).**
- Prime your wall and paint it to your wall colour
- The cold air comes primed white and ready for your paint colour.

## FEATURES

- Triple fibre reinforced cement board grill.
- Easy installation, primed and ready to paint.
- Machined outer edge to allow for screws, tape and drywall compound
- 20 degree angled vent slots for directional venting.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

## PRODUCT SPECIFICATIONS

- Over 68 square inches (439 square centimeters) of open area.
- Slot Size: 0.32" x 5.91" (8mm x 150mm).
- 36 angled horizontal slots.
- Slot Angle - 20 degrees
- Overall dimensions are 32" x 10" x 0.5" (813mm x 254mm x 12mm).
- Product weight is 4 pounds (1.8 kilograms)

## MATERIAL SPECIFICATIONS

Raw Material: cement, fibres, quartz sand, non-hazardous fillers  
 Density:  $1.0 < D \leq 1.2 \text{ g/cm}^3$   
 Asbestos Content: 100% asbestos-free  
 Fire resistance: non-combustible  
 Water Absorption:  $\leq 40\%$   
 Resistant Bending Strength:  $\leq 10.5 \text{ MPa dry}$   
 Moisture Movement: 0.25 %  
 Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing

## AIRFLOW DATA

			Core Velocity [FPM]	300	400	500	600	700	800	1000	1200	1400
Opening Width [in]	Opening Height [in]	Core Area [ft²]	Core Velocity Pressure [\"wc]	0.006	0.010	0.016	0.022	0.030	0.040	0.062	0.090	0.122
28	6	1.167	Flow [CFM]	225	300	376	451	526	601	751	901	1052
			Static Pressure [\"wc]	0.028	0.050	0.078	0.112	0.153	0.199	0.311	0.448	0.610

tested by: Airflow Sciences Corporation



Manufactured by: DGM Enterprises, 1173 North Service Road West, Unit D8 & D9, Oakville ON, L6M-2V9, Canada  
 PH: 905-847-2424 TOLL FREE: 1-877-636-1113 FAX: 1-877-349-3036 EMAIL: info@made2match.ca

For more products, please visit us at [www.made2match.ca](http://www.made2match.ca) or scan below.

